

**CONTINUOUS DUTY**
**4 poles  
50 Hz - 1500 rpm / 60 Hz - 1800 rpm**

<b>AMBIENT TEMPERATURE</b>	40°C	<b>WINDING DATA</b>		Winding code	<b>80</b>			
<b>TEMPERATURE RISE</b>	H			Number of leads	<b>6</b>			
<b>INSULATION CLASS</b>	H			Winding pitch	<b>2/3</b>			
<b>POWER FACTOR</b>	0,8							
<b>FREQUENCY</b>	Hz	<b>50 Hz</b>			<b>60 Hz</b>			
<b>VOLTAGE</b>	Star V	<b>380</b>	<b>400</b>	<b>415</b>	<b>416</b>	<b>440</b>	<b>460</b>	<b>480</b>
<b>RATING</b>	kVA kW	<b>3100</b> <b>2480</b>	<b>3200</b> <b>2560</b>	<b>3200</b> <b>2560</b>	<b>3320</b> <b>2656</b>	<b>3470</b> <b>2776</b>	<b>3660</b> <b>2928</b>	<b>3680</b> <b>2944</b>
<b>EFFICIENCY [%] @ 0,8 p.f.</b>	4/4 3/4 2/4	96,4 96,5 96,5	96,5 96,6 96,5	96,5 96,6 96,5	96,4 96,4 96,3	96,4 96,5 96,3	96,5 96,5 96,4	96,6 96,6 96,4
<b>EFFICIENCY [%] @ 1 p.f.</b>	4/4 3/4 2/4	97,2 97,3 97,2	97,2 97,3 97,3	97,2 97,3 97,2	97,2 97,2 97,1	97,2 97,2 97,1	97,2 97,3 97,2	97,3 97,3 97,2
<b>SHORT CIRCUIT RATIO</b>	SCR	0,33	0,35	0,38	0,30	0,33	0,34	0,37
<b>REACTANCES [%]</b>								
Direct axis synchronous	X <sub>d</sub>	342	319	296	367	343	331	306
Quadrature axis synchronous	X <sub>q</sub>	192	179	166	206	192	186	172
Direct axis transient	X' <sub>d</sub>	35,4	33,0	30,7	38,0	35,5	34,2	31,6
Direct axis subtransient	X'' <sub>d</sub>	17,1	15,9	14,8	18,3	17,1	16,5	15,2
Quadrature axis subtransient	X'' <sub>q</sub>	16,6	15,5	14,4	17,8	16,7	16,1	14,9
Negative sequence	X <sub>2</sub>	16,9	15,7	14,6	18,1	16,9	16,3	15,0
Zero sequence	X <sub>0</sub>	5,5	5,1	4,7	5,9	5,5	5,3	4,9
<b>TIME CONSTANTS [s]</b>								
Open circuit	T' <sub>do</sub>				4,8			
Transient	T' <sub>d</sub>				0,5			
Subtransient	T'' <sub>d</sub>				0,025			
Armature	T <sub>a</sub>				0,06			

**MECHANICAL CHARACTERISTICS**

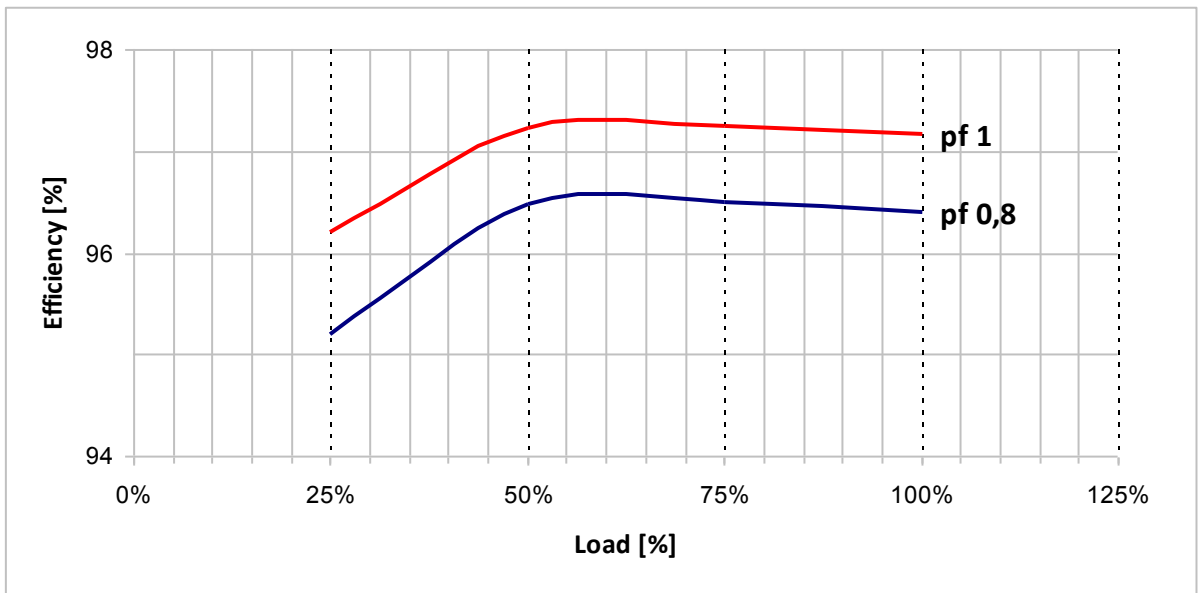
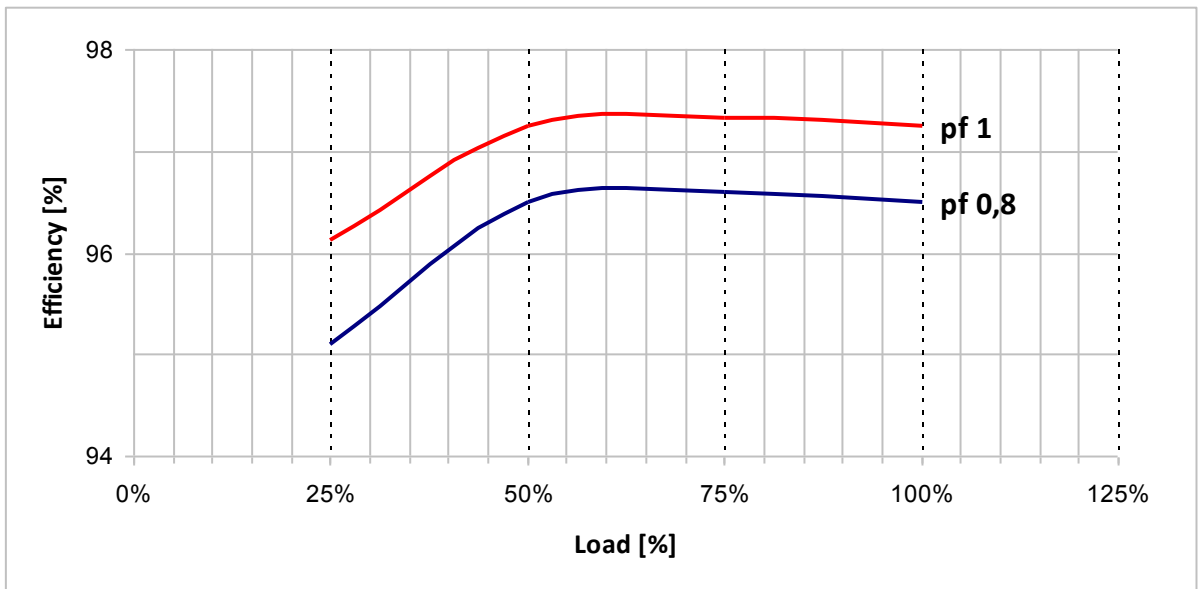
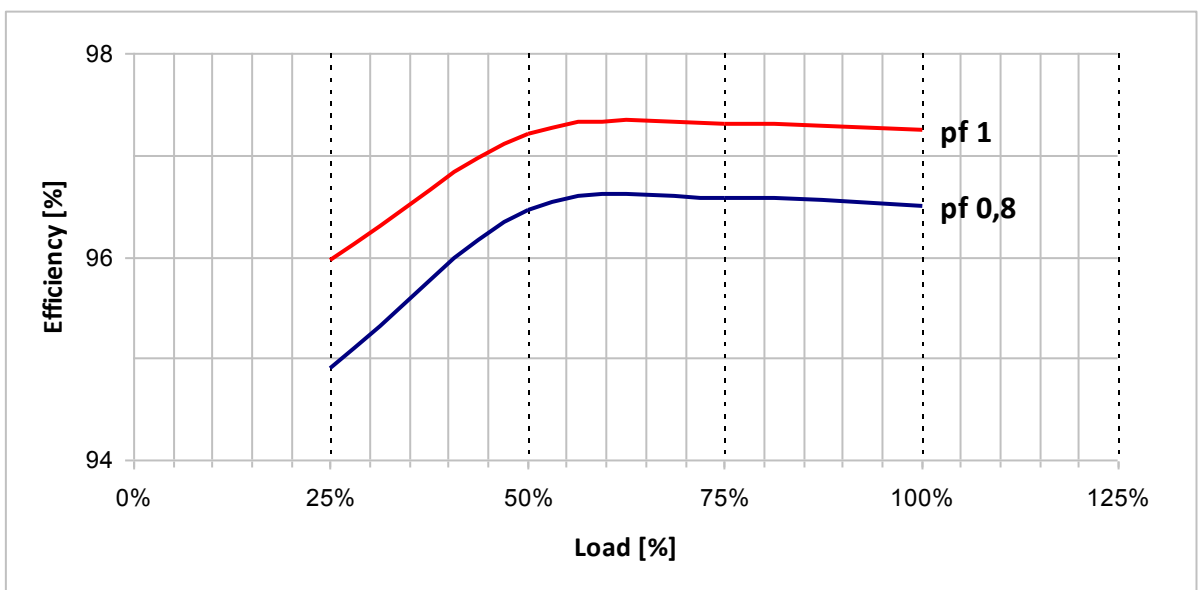
D-end bearing/Lubrication	6332 C3 / With grease nipple
N-end bearing/Lubrication	6330 C3 / With grease nipple
Overspeed [r.p.m.]	2250
Inertia (J) [kgm <sup>2</sup> ]	Refer to B34 construction 95
Weight [kg]	Refer to B34 construction 6450
Method of cooling	IC01
Cooling air required [m <sup>3</sup> /s] @ 50/60 Hz	2,60 / 3,10
Degree of protection	IP23
Types of construction available	B2 (SAE) - IM B34 - IM B20
Direction of rotation (Standard)	CW

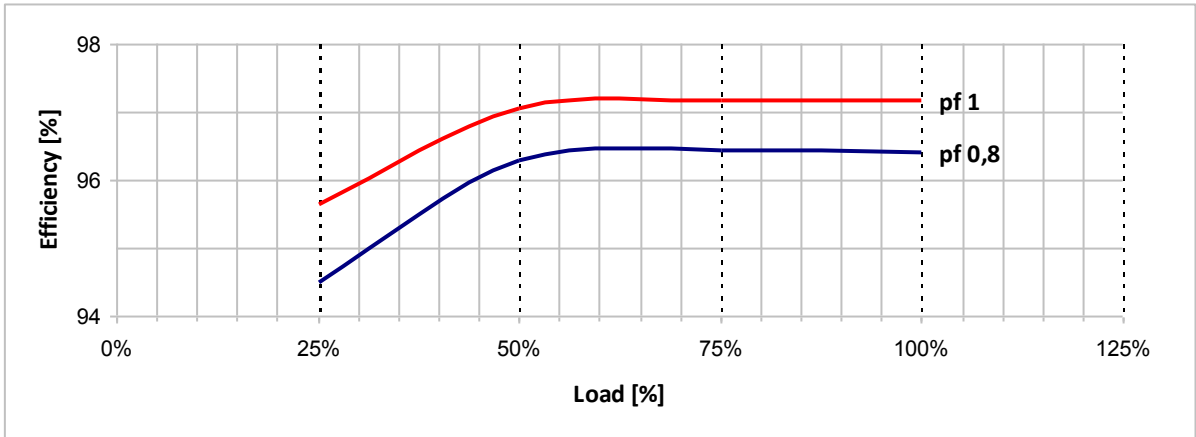
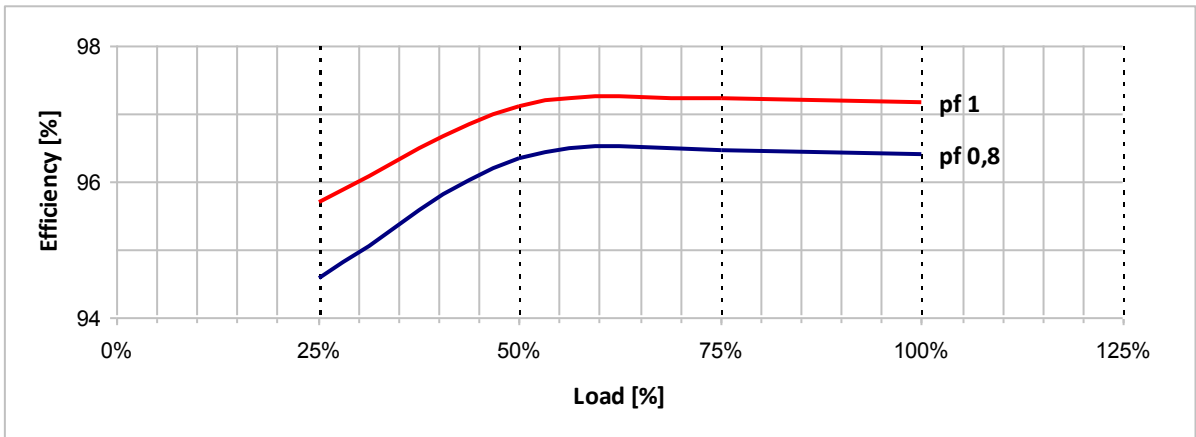
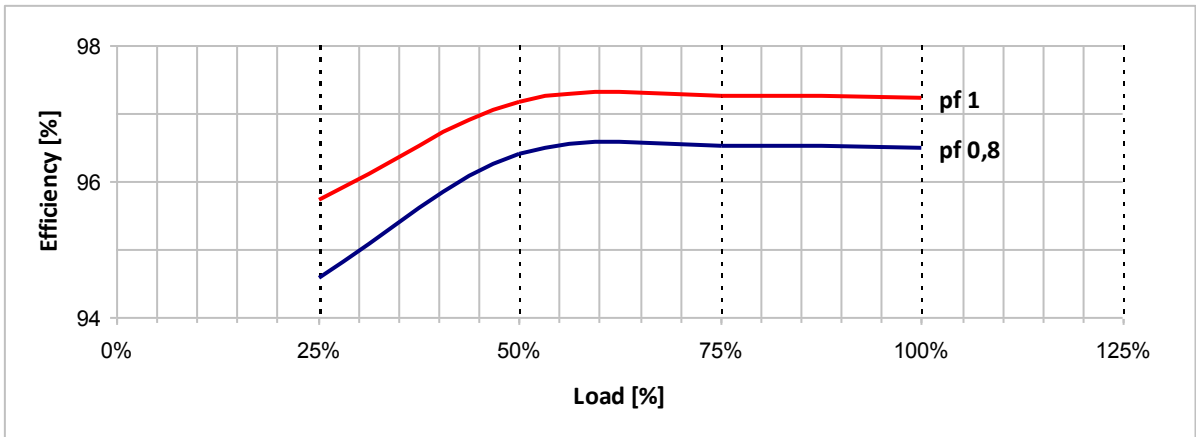
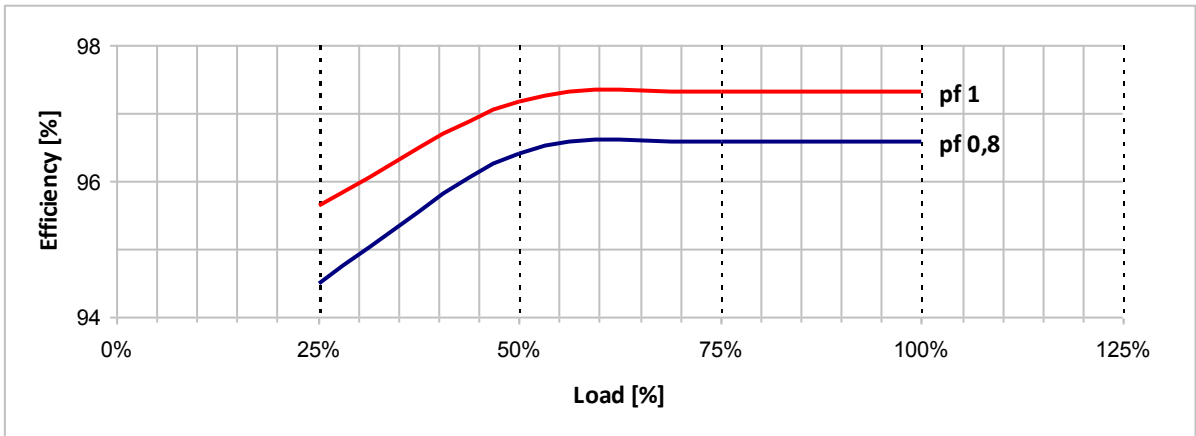
**OTHER DATA**

Phase resistance [Ω] @ 20 °C - Star series	0,37
Overloads	10% for 1 hour every 12 hours
3-phase short circuit sustained current	≥ 300 % (3 I <sub>n</sub> ) with VARICOMP device
Voltage regulation accuracy	± 0,5 % I <sub>n</sub> steady state condition
Radio interference	EN 55011 - Class B Group 1
Wave form THF	< 5%
Total harmonic content	< 5% - At no load

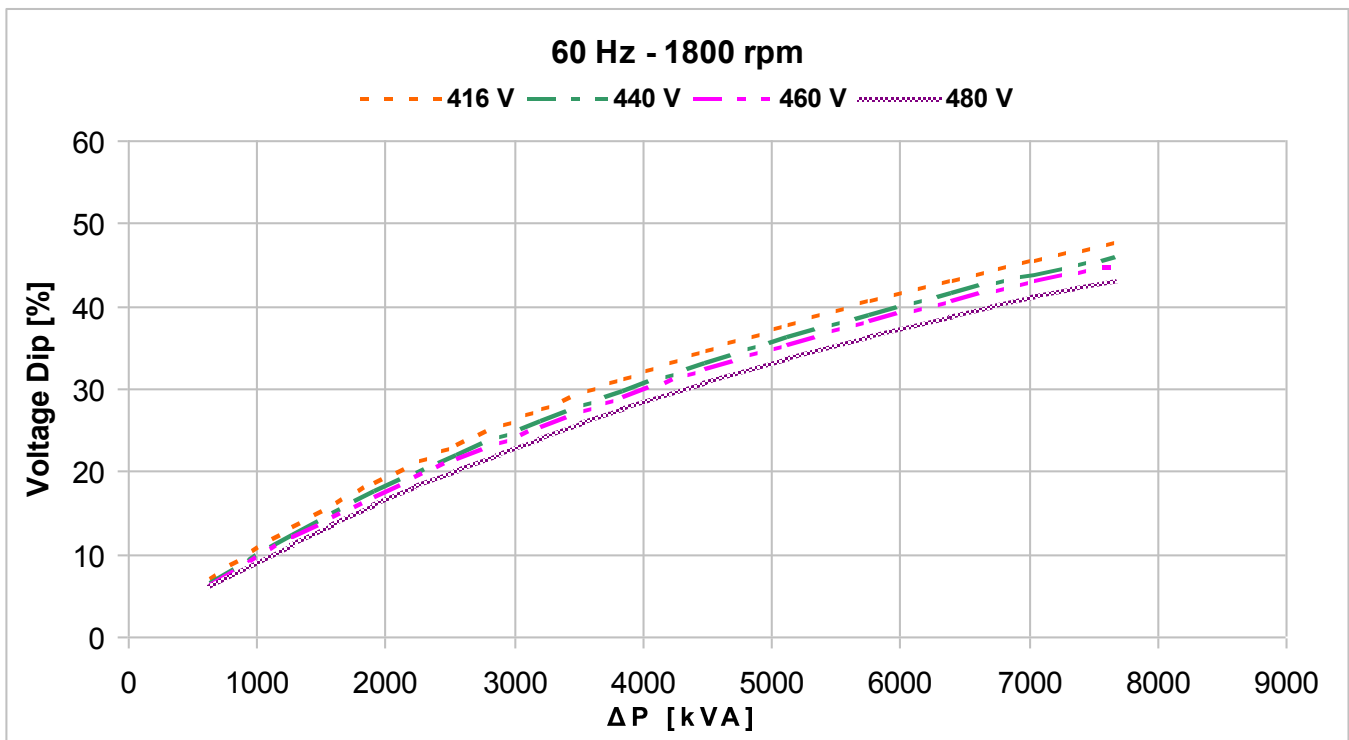
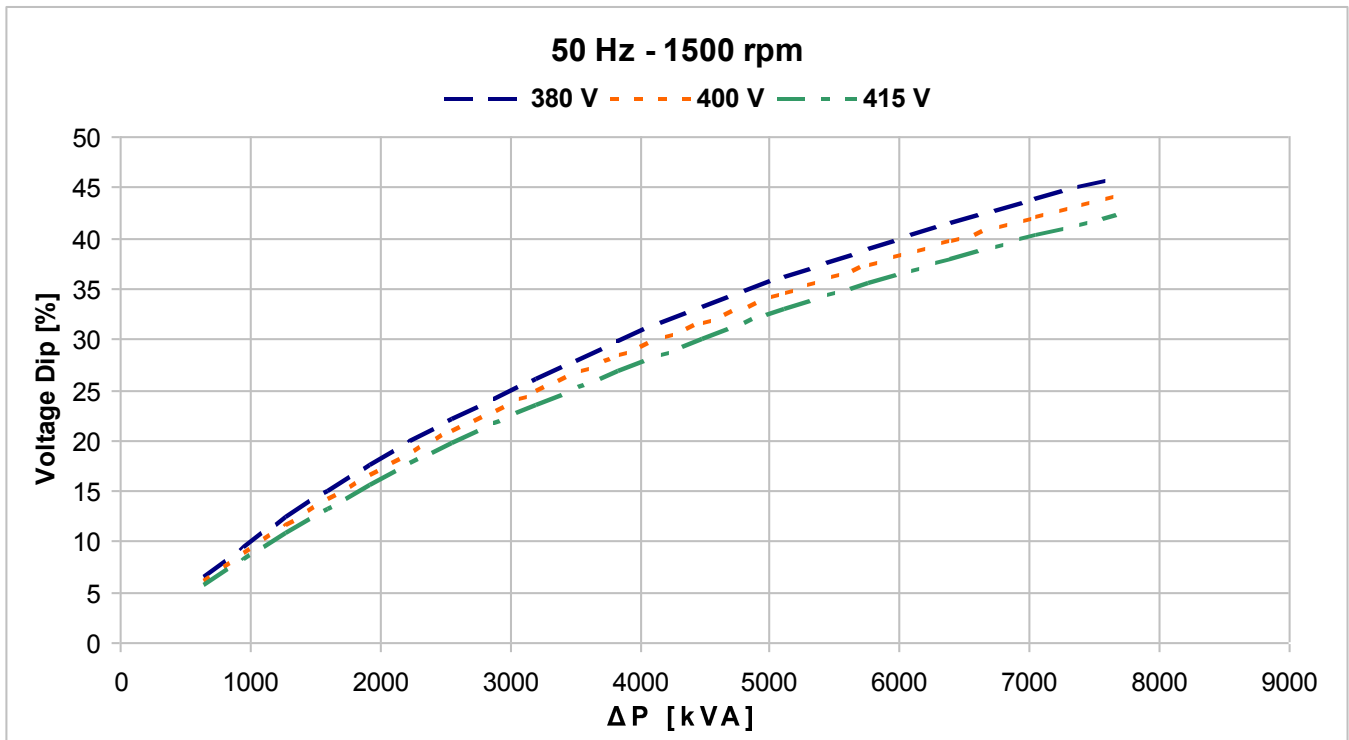
**STANDARDS**

IEC 60034-1; CEI 2-3; BS 4999-5000; VDE 0530; NF 51-100,111; OVE M-10, NEMA MG 1.22.

**Typical efficiency curves**
**50 Hz - 1500 rpm**
**380 V**

**400 V**

**415 V**


**Typical efficiency curves**
**60 Hz - 1800 rpm**
**416 V**

**440 V**

**460 V**

**480 V**


### Locked rotor motor starting curves (\*)



$$\Delta P = P_n \times \frac{I_s / I_n}{\cos \varphi_n \times \eta_n}$$

(\*): A coefficient of 0,85 must be applied to the voltage dip if the load has a power factor equal or greater than 0,8.