

CONTINUOUS DUTY

4 poles
50 Hz - 1500 rpm / 60 Hz - 1800 rpm

AMBIENT TEMPERATURE	40°C	WINDING DATA		Winding code	80			
TEMPERATURE RISE	H			Number of leads	6			
INSULATION CLASS	H			Winding pitch	2/3			
POWER FACTOR	0,8							
FREQUENCY	Hz	50 Hz			60 Hz			
VOLTAGE	Star V	380	400	415	416	440	460	480
RATING	kVA	1300	1300	1300	1450	1520	1560	1625
	kW	1040	1040	1040	1160	1216	1248	1300
EFFICIENCY [%] @ 0,8 p.f.	4/4	95,6	95,8	95,9	95,8	96,0	96,2	96,3
	3/4	96,0	96,0	96,0	96,1	96,3	96,4	96,5
	2/4	96,1	96,0	96,0	96,2	96,4	96,5	96,5
EFFICIENCY [%] @ 1 p.f.	4/4	96,5	96,7	96,8	96,7	96,8	97,0	97,1
	3/4	96,8	96,8	96,8	96,9	97,1	97,2	97,2
	2/4	96,9	96,9	96,9	97,0	97,2	97,2	97,2
SHORT CIRCUIT RATIO	SCR	0,42	0,46	0,50	0,37	0,40	0,42	0,44
REACTANCES [%]								
Direct axis synchronous	Xd	277	250	232	309	290	272	260
Quadrature axis synchronous	Xq	154	139	129	172	161	151	145
Direct axis transient	X'd	24,9	22,5	20,9	27,8	26,1	24,5	23,4
Direct axis subtransient	X''d	10,4	9,4	8,7	11,6	10,9	10,2	9,8
Quadrature axis subtransient	X''q	10,9	9,8	9,1	12,1	11,4	10,7	10,2
Negative sequence	X ₂	10,6	9,6	8,9	11,9	11,1	10,5	10,0
Zero sequence	X ₀	2,3	2,1	2,0	2,6	2,4	2,3	2,2
TIME CONSTANTS [s]								
Open circuit	T'do				2,49			
Transient	T'd				0,22			
Subtransient	T''d				0,014			
Armature	T _a				0,022			

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	6324 C3 / With grease nipple
N-end bearing/Lubrication	6318 Z C3 / Prelubricated
Overspeed [r.p.m.]	2250
Inertia (J) [kgm ²]	Refer to B34 construction 22,5
Weight [kg]	Refer to B34 construction 2800
Method of cooling	IC01
Cooling air required [m ³ /s] @ 50/60 Hz	1,30 / 1,55
Degree of protection	IP23
Types of construction available	B2 (SAE) - IM B34 - IM B20
Direction of rotation (Standard)	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	1,4
Overloads	10% for 1 hour every 12 hours
3-phase short circuit sustained current	$\geq 300\%$ (3 I _n) with auxiliary winding
Voltage regulation accuracy	$\pm 0,5\%$ I _n steady state condition
Radio interference	EN 55011 - Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% - At no load


STANDARDS

IEC 60034-1; CEI 2-3; BS 4999-5000; VDE 0530; NF 51-100,111; OVE M-10, NEMA MG 1.22.
--


Typical efficiency curves

50 Hz - 1500 rpm

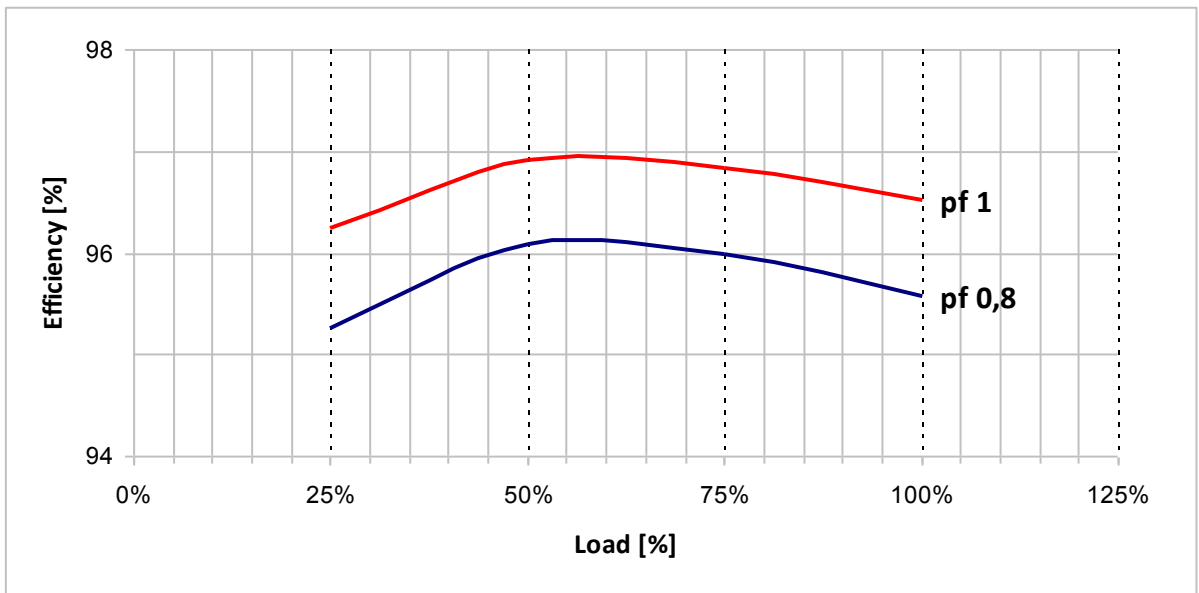
380 V







400 V


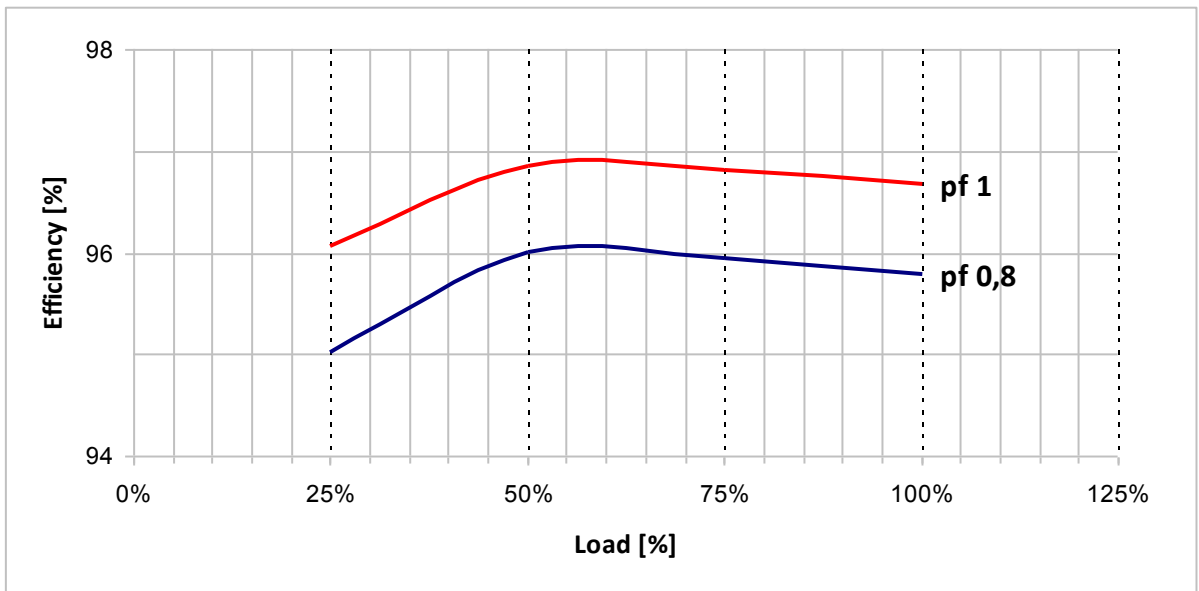


415 V

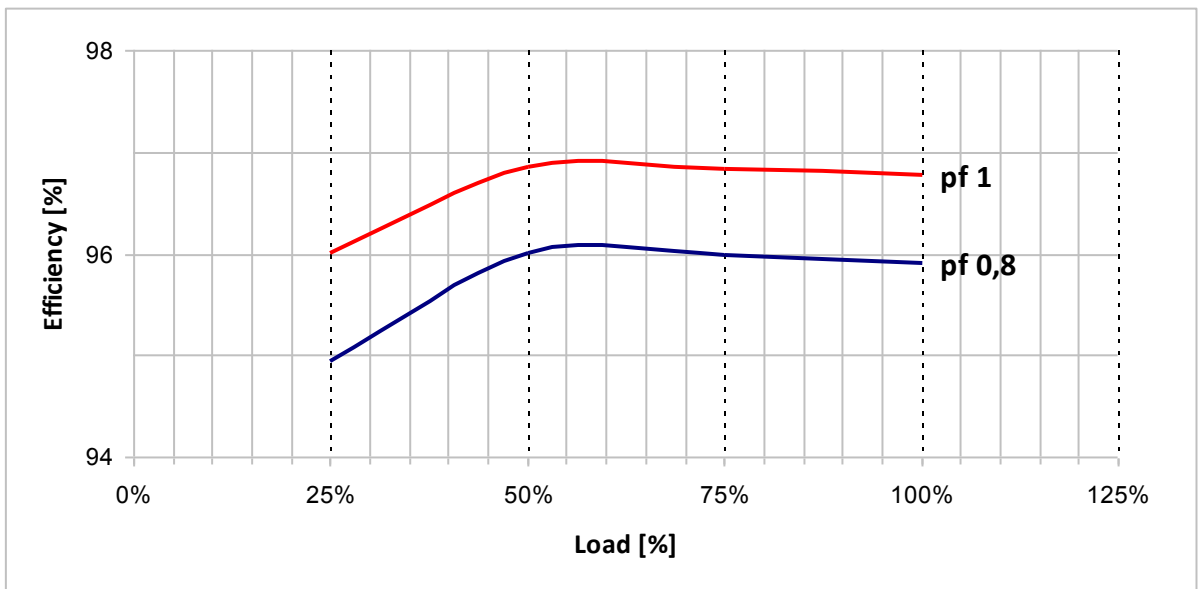

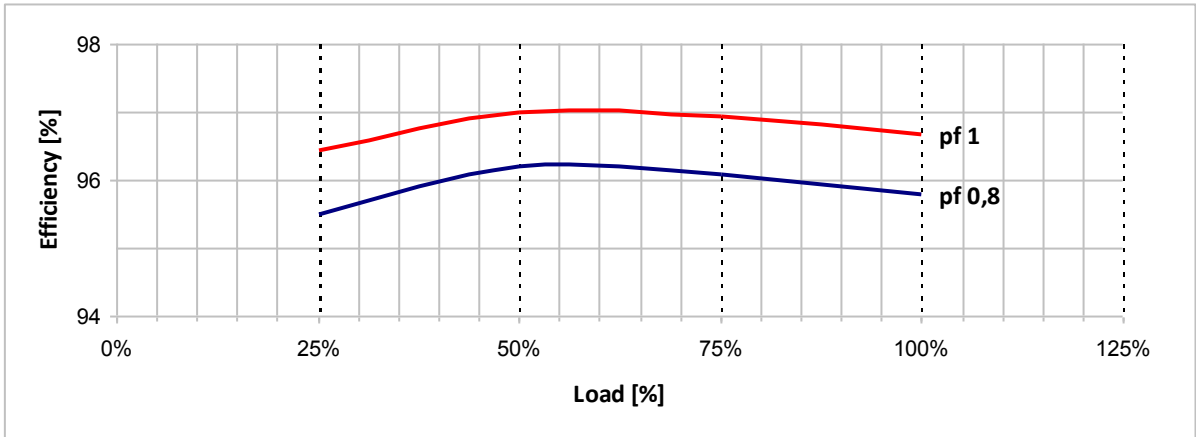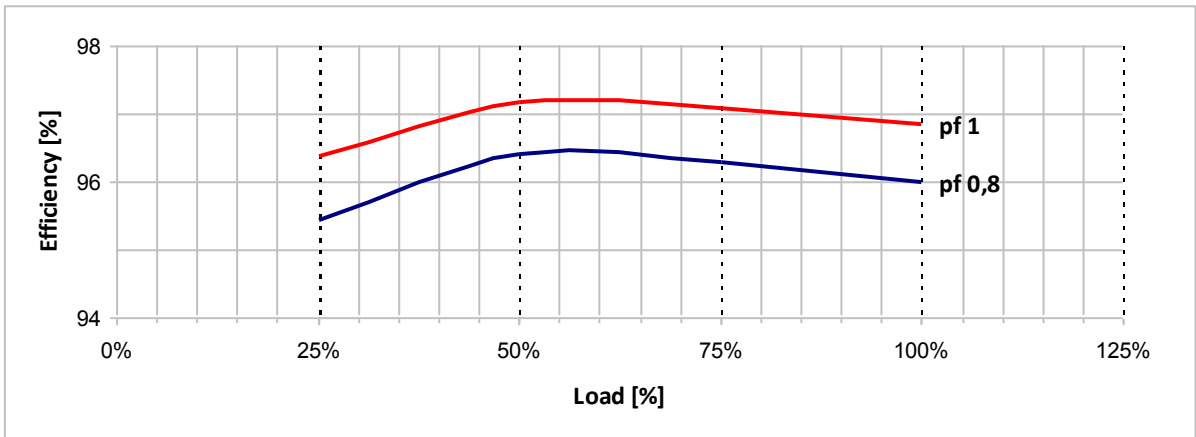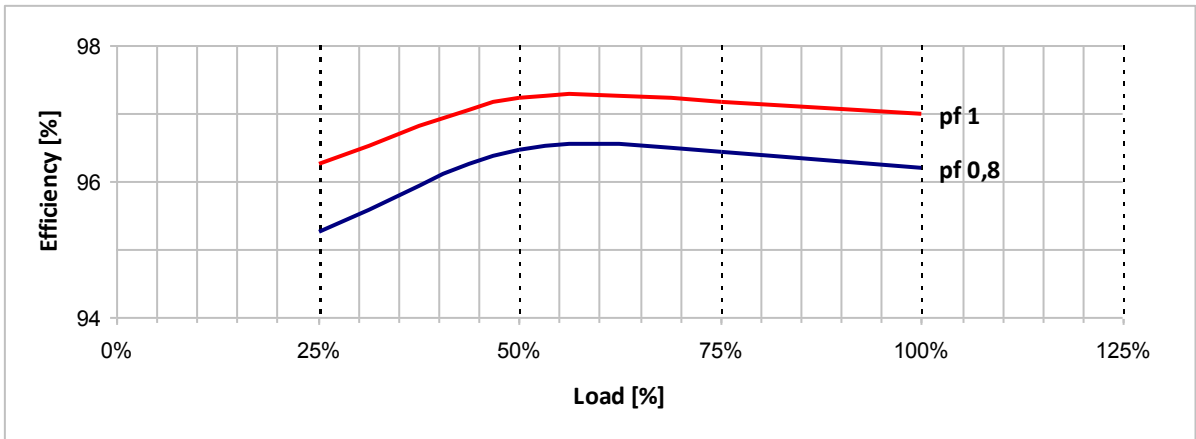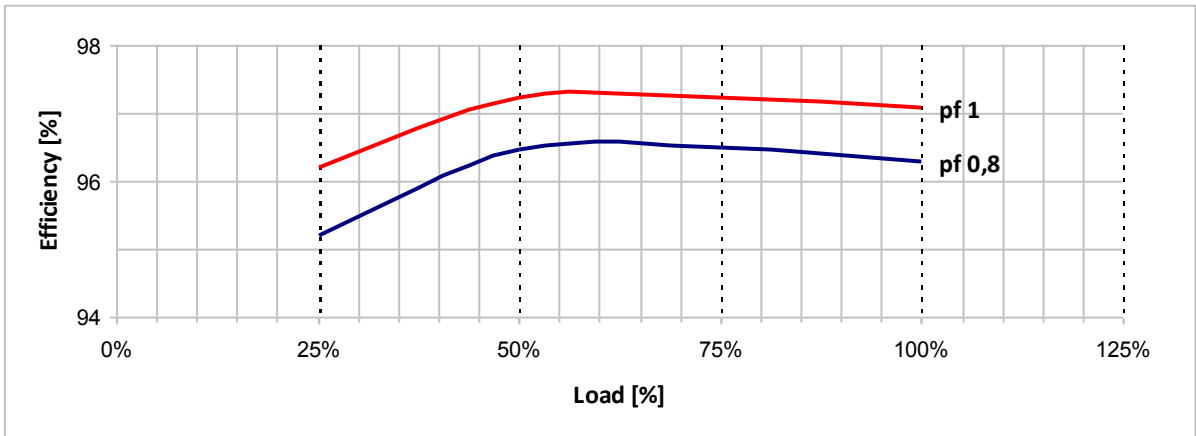Typical efficiency curves
60 Hz - 1800 rpm
416 V

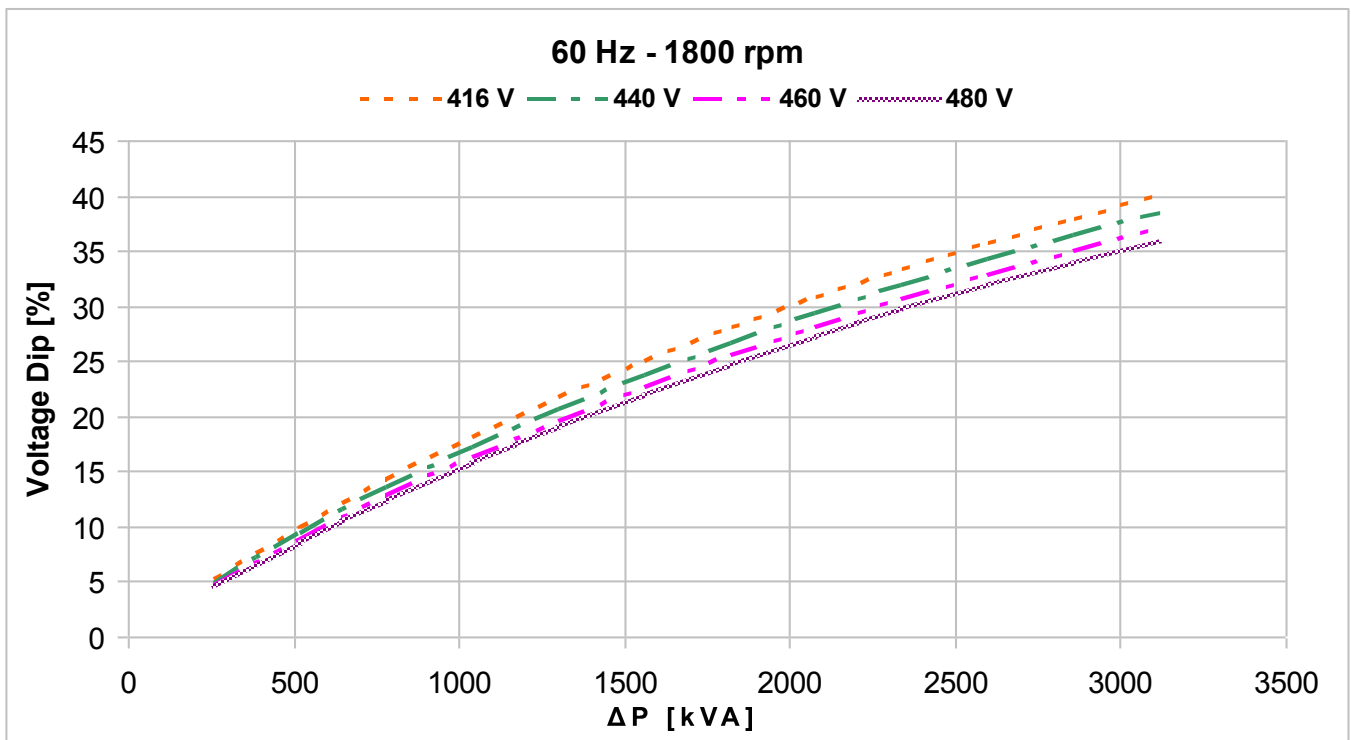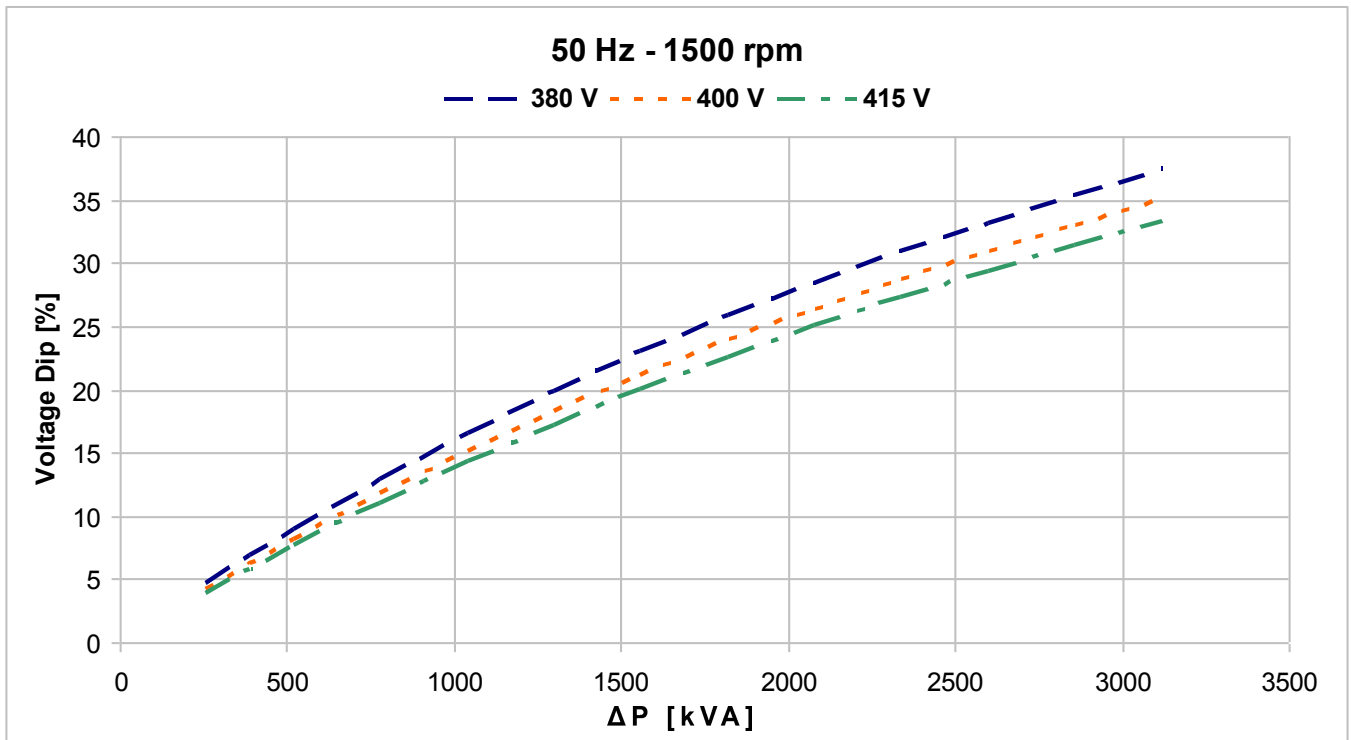440 V

460 V

480 V


Locked rotor motor starting curves (*)



$$\Delta P = P_n \times \frac{I_s/I_n}{\cos \varphi_n \times \eta_n}$$

(*): A coefficient of 0,85 must be applied to the voltage dip if the load has a power factor equal or greater than 0,8.