

CONTINUOUS DUTY
**4 poles
50 Hz - 1500 rpm / 60 Hz - 1800 rpm**

AMBIENT TEMPERATURE TEMPERATURE RISE INSULATION CLASS POWER FACTOR	40°C H H 0,8	WINDING DATA							
						Winding code	80	Number of leads	6
FREQUENCY	Hz	50 Hz			60 Hz				
VOLTAGE	Star V	380	400	415	416	440	460	480	
RATING	kVA kW	1020 816	1050 840	1050 840	1200 960	1250 1000	1250 1000	1320 1056	
EFFICIENCY [%] @ 0,8 p.f.	4/4 3/4 2/4	95,1 95,5 95,6	95,3 95,5 95,6	95,4 95,5 95,6	95,3 95,6 95,7	95,5 95,7 95,7	95,6 95,8 95,8	95,7 95,9 95,9	
EFFICIENCY [%] @ 1 p.f.	4/4 3/4 2/4	96,2 96,5 96,6	96,3 96,5 96,5	96,3 96,5 96,5	96,3 96,5 96,6	96,4 96,6 96,6	96,5 96,7 96,7	96,6 96,8 96,8	
SHORT CIRCUIT RATIO	SCR	0,37	0,4	0,43	0,32	0,34	0,37	0,38	
REACTANCES [%]									
Direct axis synchronous	X _d	330	307	285	389	362	332	322	
Quadrature axis synchronous	X _q	183	170	158	216	201	184	178	
Direct axis transient	X' _d	31,6	29,4	27,3	37,3	34,7	31,8	30,8	
Direct axis subtransient	X'' _d	14,4	13,4	12,4	17,0	15,8	14,5	14,0	
Quadrature axis subtransient	X'' _q	14,6	13,6	12,6	17,2	16,1	14,7	14,2	
Negative sequence	X ₂	14,5	13,5	12,5	17,1	15,9	14,6	14,1	
Zero sequence	X ₀	3,4	3,2	2,9	4,0	3,7	3,4	3,3	
TIME CONSTANTS [s]									
Open circuit	T' _{do}	2,4							
Transient	T' _d	0,23							
Subtransient	T'' _d	0,018							
Armature	T _a	0,022							

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	6324 C3 / With grease nipple
N-end bearing/Lubrication	6318 Z C3 / Prelubricated
Overspeed [r.p.m.]	2250
Inertia (J) [kgm ²]	Refer to B34 construction 17
Weight [kg]	Refer to B34 construction 2300
Method of cooling	IC01
Cooling air required [m ³ /s] @ 50/60 Hz	1,30 / 1,55
Degree of protection	IP23
Types of construction available	B2 (SAE) - IM B34 - IM B20
Direction of rotation (Standard)	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	2,4
Overloads	10% for 1 hour every 12 hours
3-phase short circuit sustained current	≥ 300 % (3 I _n) with auxiliary winding
Voltage regulation accuracy	± 0,5 % I _n steady state condition
Radio interference	EN 55011 - Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% - At no load


STANDARDS

IEC 60034-1; CEI 2-3; BS 4999-5000; VDE 0530; NF 51-100,111; OVE M-10, NEMA MG 1.22.


Typical efficiency curves

50 Hz - 1500 rpm

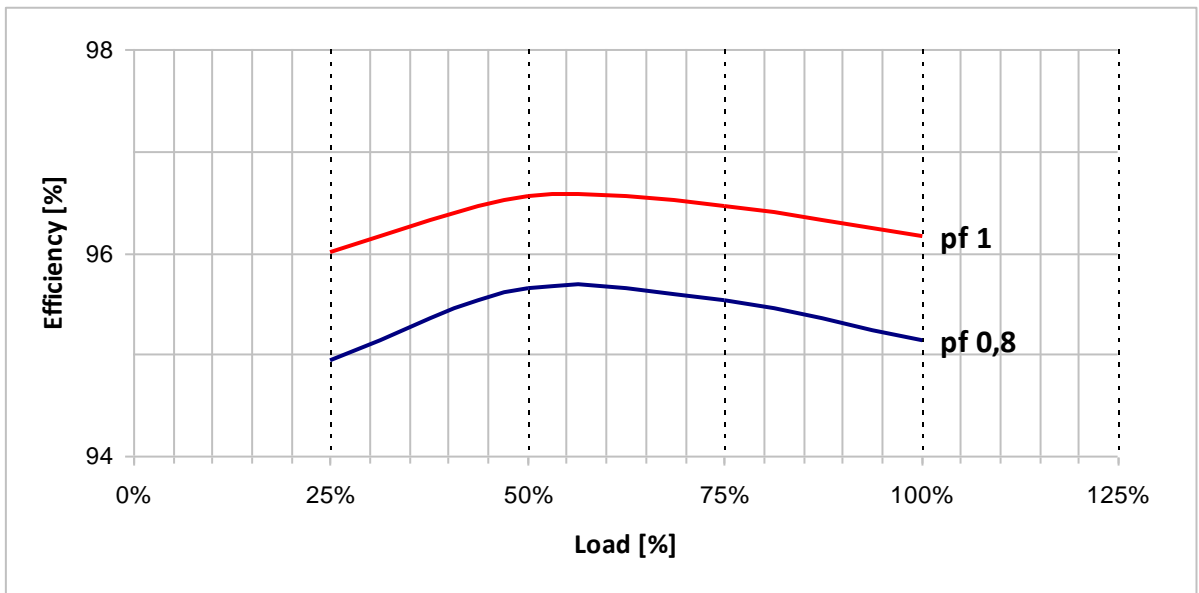
380 V







400 V


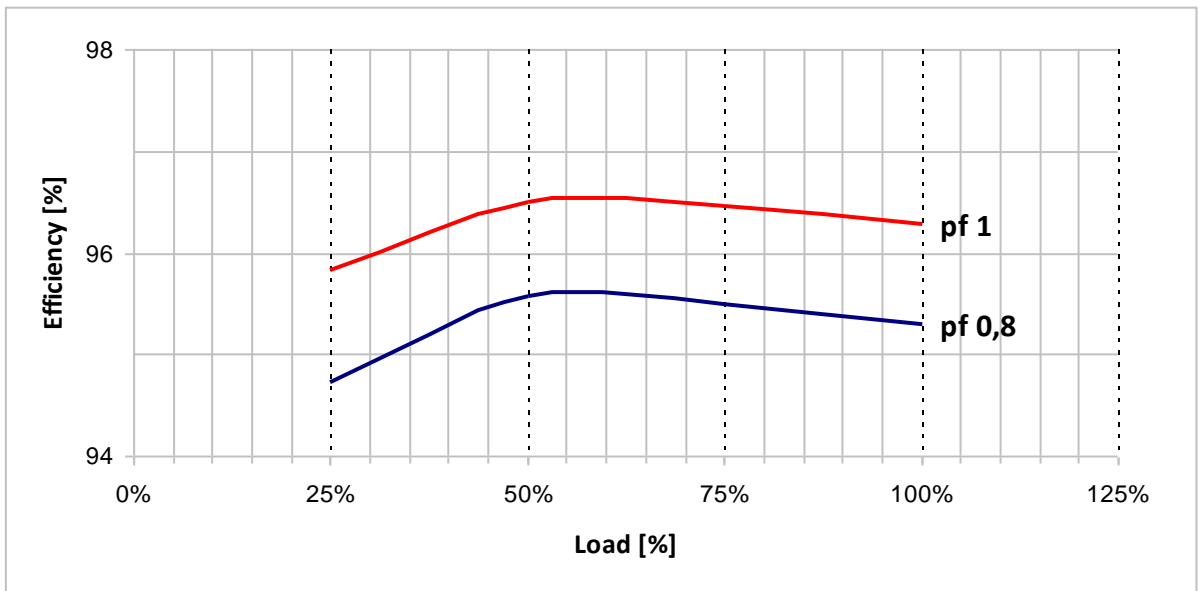


415 V

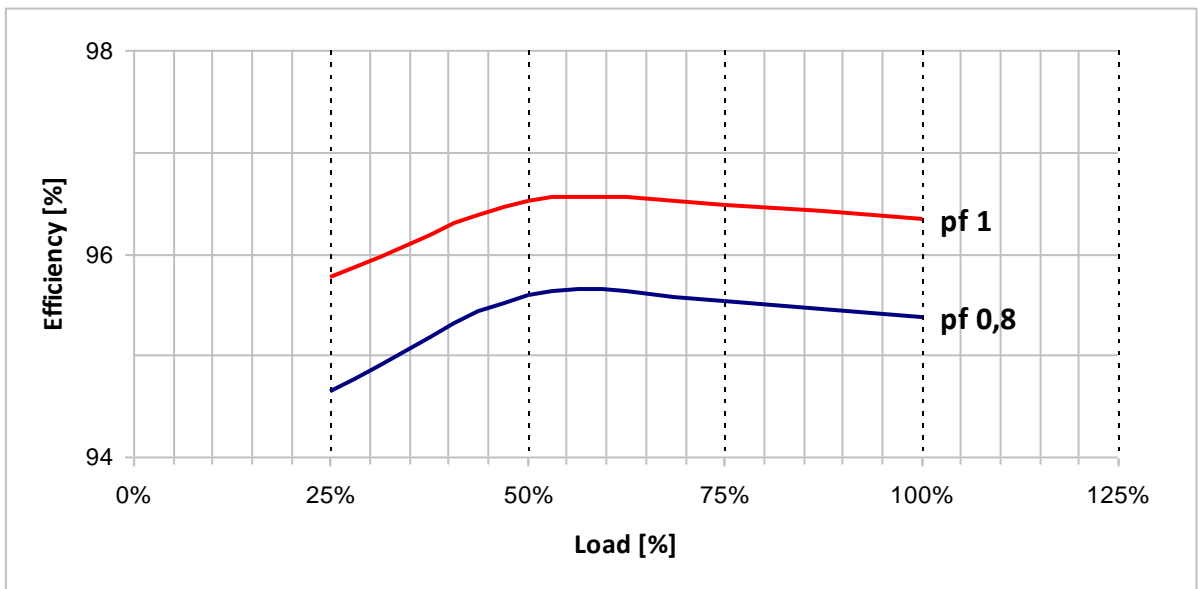

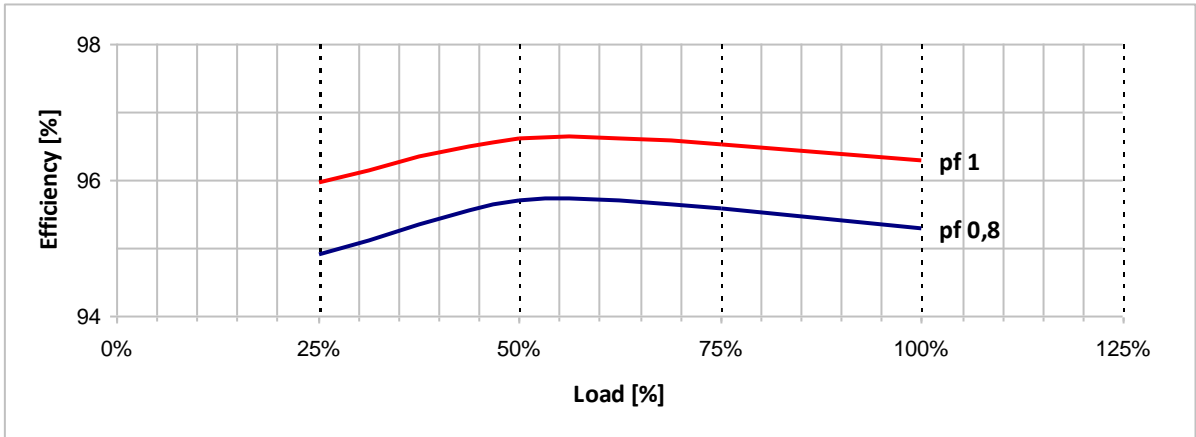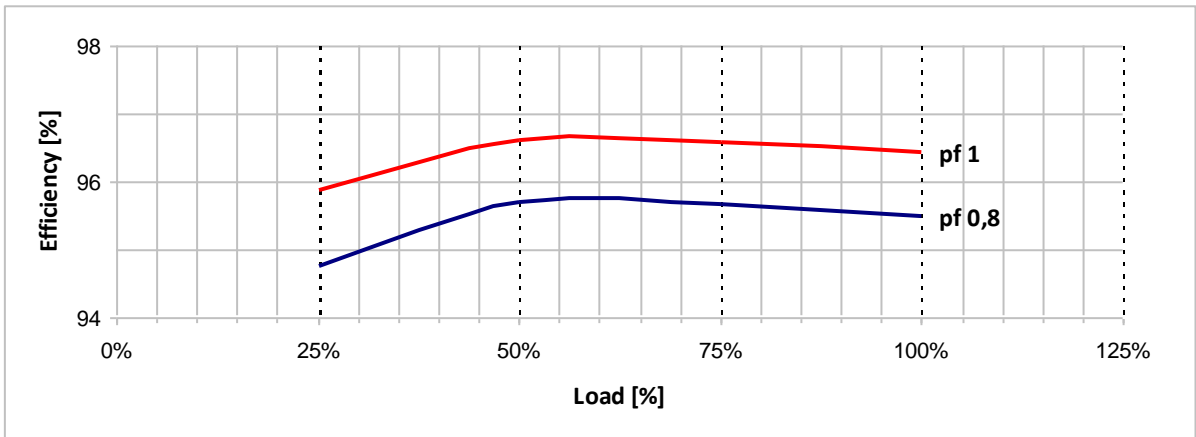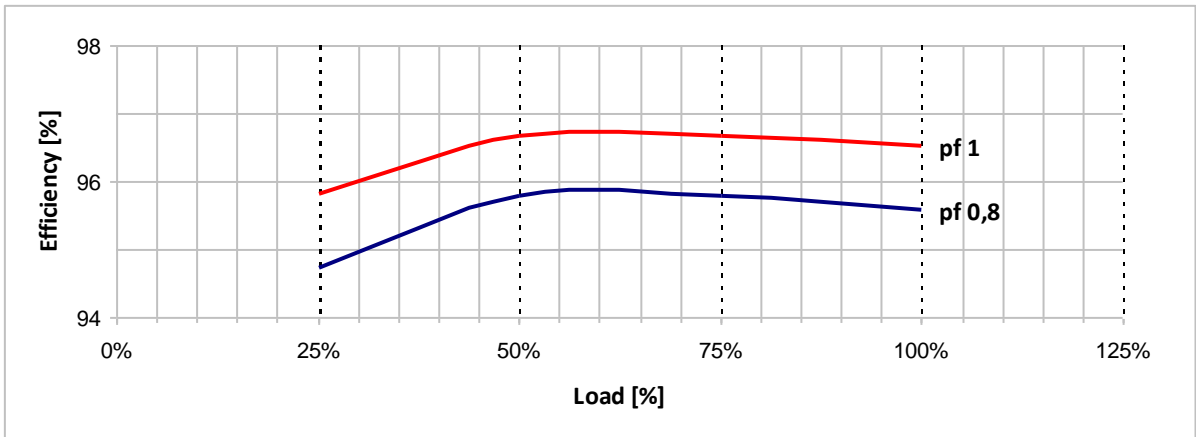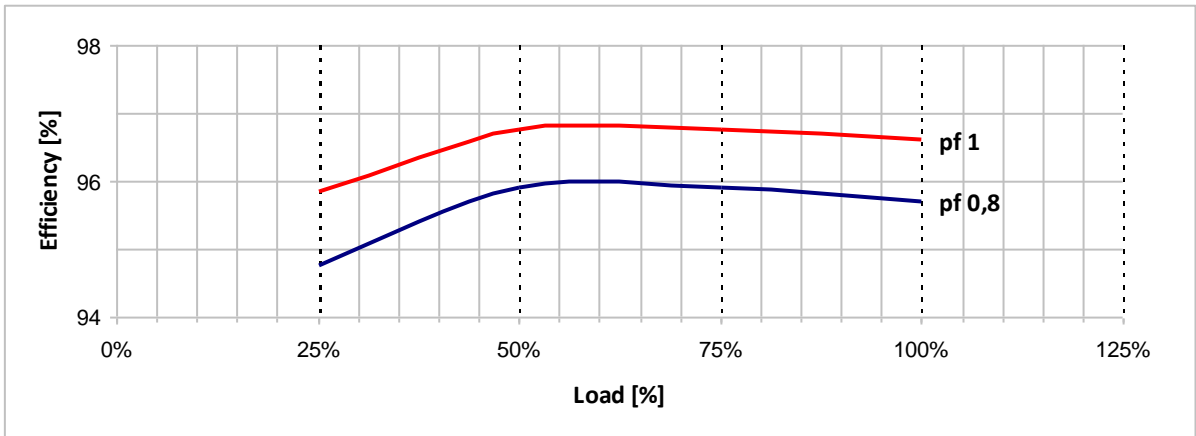Typical efficiency curves
60 Hz - 1800 rpm
416 V

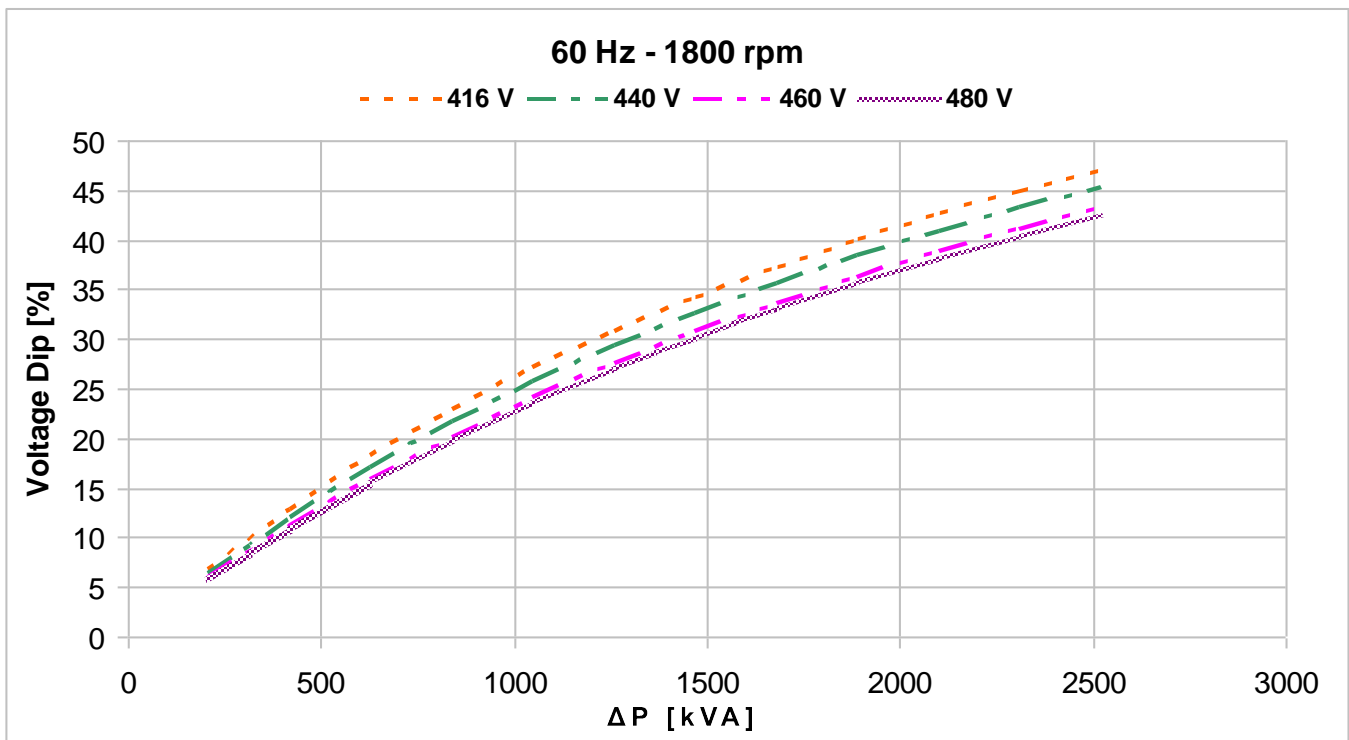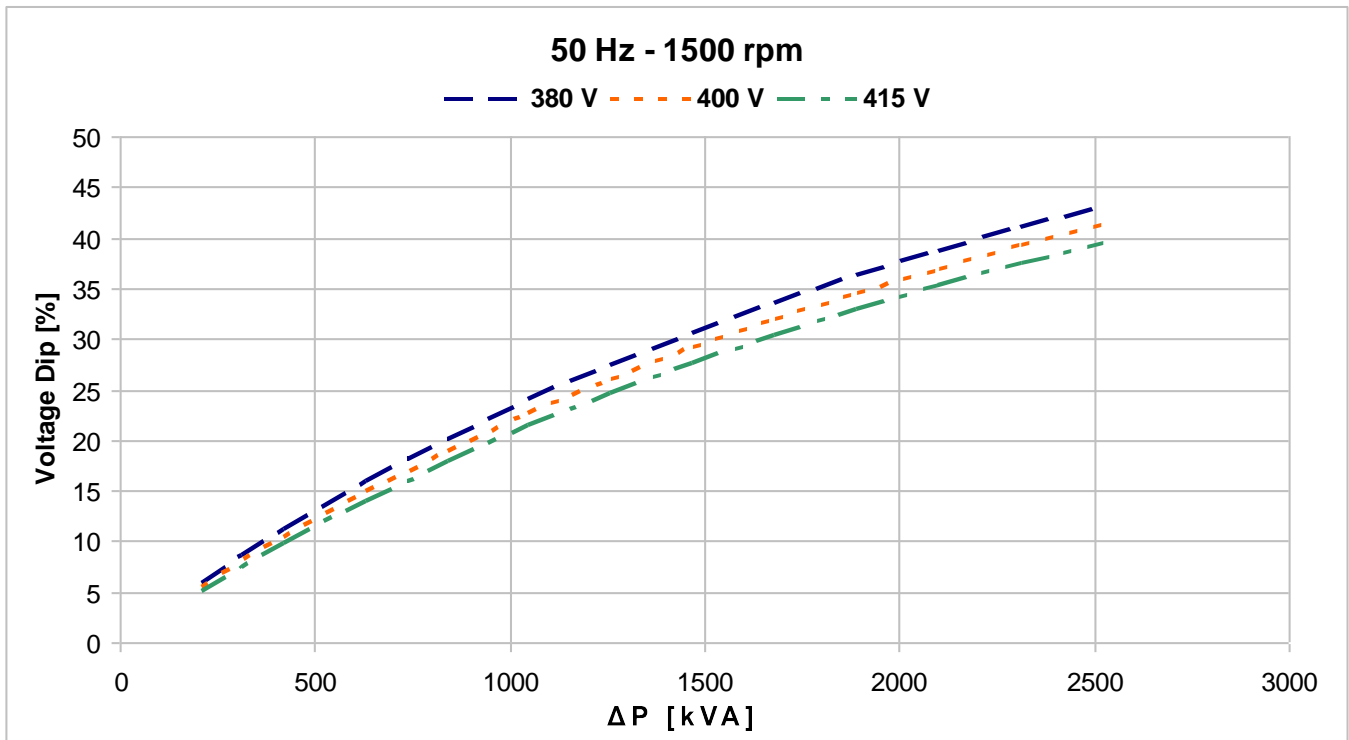440 V

460 V

480 V


Locked rotor motor starting curves (*)



$$\Delta P = P_n \times \frac{I_s/I_n}{\cos \varphi_n \times \eta_n}$$

(*): A coefficient of 0,85 must be applied to the voltage dip if the load has a power factor equal or greater than 0,8.